

THE Modular MVP at 0.7C_v

Features:

- Modular in increments of 1 up to 12 valves.
- Lightweight polymer design.
- Direct or DIN rail mounting.




Models:

- 2 x 3/2, 5/2 and 5/3 versions
- Spring return, single and double solenoid configurations
- 24 VDC solenoid voltage
- Low profile w/high flow rate at 0.7C_v
- Internal & external piloting versions
- Sandwich regulator accessory

Electronic Control Options:

- D-Sub
- Profibus DP
- DeviceNet
- CANopen
- DDL
- AS-i

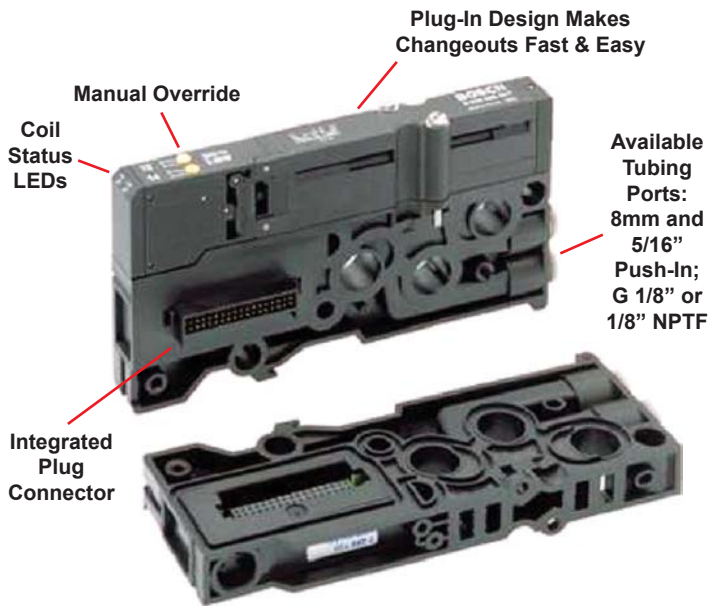

Rexroth
Bosch Group

For complete product and pricing information contact your friendly Womack Field Representative or your reliable Womack Customer Service Representative today.

Warehouses

Birmingham, AL
(205) 798-9440
Fax: (205) 798-3532

Houston, TX
(800) 569-9807
Fax: (713) 956-2539

Dallas, TX
(800) 569-9801
Fax: (214) 630-5314

Tulsa, OK
(800) 569-9803
Fax: (918) 838-2759

Additional Sales Offices

Bentonville, AR
(800) 569-9803
Fax: (918) 838-2759

Kansas City, MO
(800) 569-9803
Fax: (918) 838-2759

Jackson, MS
(601) 856-5999
Fax: (205) 798-3532

Lafayette, LA
(800) 569-9808
Fax: (504) 361-4552

Little Rock, AR
(800) 569-9803
Fax: (918) 838-2759

Lubbock, TX
(800) 569-9801
Fax: (214) 630-5314

New Orleans, LA
(800) 569-9808
Fax: (504) 361-4552

Oklahoma City, OK
(800) 569-9803
Fax: (918) 838-2759

San Antonio, TX
(800) 569-9807
Fax: (713) 956-2539

Tyler, TX
(800) 569-9801
Fax: (214) 630-5314