

The Ideal Valve System for Wash-Down Applications


Performance Benefits

- Hygienic design for food contact.
- No cabinet needed. IP69 liquid protection class. Watertight under high pressure (1450 PSI) spray.
- Resistant to aggressive detergents and chemicals; lye, phosphoric acid, sodium.
- Operating temperature range: 32° F to 122° F.



Design Features

- Modular; up to 16 valves can be added in single valve increments.
- Multi-pin or serial communication.
- Flow rate: 750-850 l/min. (0.75 to 0.85 C_v)
- 5/2 single and double solenoid, 5/3 single and double solenoid.
- Working pressure: 36-145 PSI.

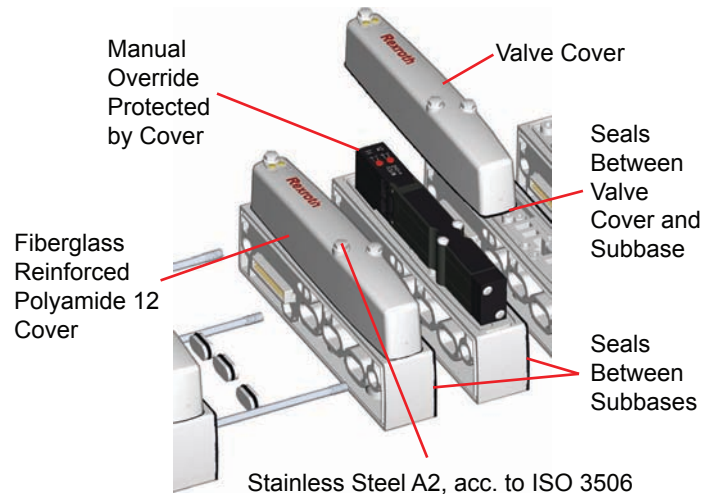

Rexroth
Bosch Group

For complete product and pricing information contact your friendly Womack Field Representative or your reliable Womack Customer Service Representative today.

Warehouses

Birmingham, AL
(205) 798-9440
Fax: (205) 798-3532

Houston, TX
(800) 569-9807
Fax: (713) 956-2539

Dallas, TX
(800) 569-9801
Fax: (214) 630-5314

Tulsa, OK
(800) 569-9803
Fax: (918) 838-2759

Additional Sales Offices

Bentonville, AR
(800) 569-9803
Fax: (918) 838-2759

Kansas City, MO
(800) 569-9803
Fax: (918) 838-2759

Jackson, MS
(601) 856-5999
Fax: (205) 798-3532

Lafayette, LA
(800) 569-9808
Fax: (504) 361-4552

Little Rock, AR
(800) 569-9803
Fax: (918) 838-2759

Lubbock, TX
(800) 569-9801
Fax: (214) 630-5314

New Orleans, LA
(800) 569-9808
Fax: (504) 361-4552

Oklahoma City, OK
(800) 569-9803
Fax: (918) 838-2759

San Antonio, TX
(800) 569-9807
Fax: (713) 956-2539

Tyler, TX
(800) 569-9801
Fax: (214) 630-5314